



KSVV90NX

Hood, Decorative wall hood, Dolce Stil Novo, Black, 90 cm, A

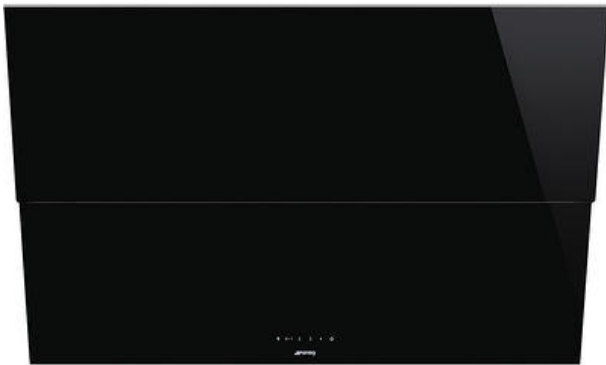

INTENSIVE EXTRACTION

A powerful intensive speed can be selected when quick extraction is needed, whether you're creating a sizzling stir fry or a preparing an aromatic curry, even the strongest cooking odours will be removed in no time.



PERIMETER EXTRACTION

This is an extremely efficient extraction process where vapors are drawn in through a restricted area of the hood quickly and then decrease once inside which reduces noise as it limits the vibrations of the filters.



TYPE

Product family: Hood • Hood Type: Decorative wall hood • Hood width: 90 cm • Extraction: Ducted out or re-circulation possible • Electronic control: Yes • Perimeter extraction: Yes • EAN code: 8017709226152

AESTHETICS

Colour: Black • Finishing: Glass • Aesthetics: Dolce Stil Novo • Design: Angled • Components finishing: Stainless steel • Material: Glass • Glass Type: Black

PROGRAMS / FUNCTIONS

No. of speeds: 3 • Intensive speed: Yes • Time-setting options: Automatic switch-off

CONTROLS

Control setting: Touch control • Led colour: Ice

TECHNICAL FEATURES

No. of lights: 2 • Light type: LED • Light power: 1 W • Light color temperature scale (°K): 4000 °K • Free outlet maximum capacity: 830 m³/h • Motor power: 280 W • No. of filters: 2 • Anti-grease filters: Stainless steel • Charcoal filters included: Yes • Minimum distance from GAS hob: 600 mm • Vent outlet: 150 mm • Minimum distance from ELECTRIC hob: 550 mm • Non return valve: Yes

PERFORMANCE / ENERGY LABEL

Energy efficiency class (EEC): A • Fluid Dynamic Efficiency class (FDEC): A • Grease Filtering Efficiency Class (GFEC): B • Lighting Efficiency Class (LEC): A • Annual Efficiency Consumption (AEC_{hood}): 59 kWh/year • Fluid Dynamic Efficiency (FDE): 29.6 • Lighting Efficiency (LE): 107 lux/W • Grease Filtering Efficiency (GFE): 87.1 % • Air flow at minimum speed (Q_{min}): 330 m³/h • Maximum extraction rate: 563 m³/h • Intensive extraction rate: 757 m³/h • Airborne acoustical A-weighted sound Power Emission at minimum speed (SPE_{min}): 50 dB(A) • Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE_{max}): 62 dB(A) • Airborne acoustical A-weighted sound power emission at boost speed (SPE_{boost}): 68 dB(A) • Power consumption in stand-by mode (P_s): 0.49 W • Time increase factor (F): 1.00 • Energy Efficiency Index per first cavity: 51.9 • Measured air flow rate at best efficiency point (Q_{bep}): 397 m³/h • Measured air pressure at best efficiency point (Q_{bep}): 431 Pa • Measured electric power input at best efficiency point (W_{bep}): 159 W • Normal Power of the light system (W_l): 2 W • Average illumination of the light on the cooking surface (E_{middle}): 250 lux • Sound power level at highest setting (L_{wa}): 62 dB(A)

ELECTRICAL CONNECTION

Nominal power: 283 W • Voltage: 220-240 V • Frequency (Hz): 50-60 Hz • Power supply cable length: 1000 mm

OPTIONAL ACCESSORIES

SPEED 1

Extraction rate IEC 61591: 345 m³/h • Noise level IEC 60704-2-13: 48 dB(A) • Power: 197 W

SPEED 2

Extraction rate IEC 61591: 460 m³/h • Noise level IEC 60704-2-13: 55 dB(A) • Power: 229 W

SPEED 3

Extraction rate IEC 61591: 600 m³/h • Noise level IEC 60704-2-13: 61 dB(A) • Power: 254 W

SPEED 4

INTENSIVE SPEED

Extraction rate (IEC 61591): 770 m³/h • Noise level IEC 60704-2-13: 68 dB(A) • Power: 266 W

LOGISTIC INFORMATION

Dimensions of the product (mm): 450x900x430 • Width: 900 mm • Depth (mm): 430 mm • Product Height (mm): 450 mm • Net weight (kg): 21.000 kg • Gross weight (kg): 26.920 kg

OPTIONAL

KITCMNDSBL: Chimney set, HoodsFLT6: Charcoal filter, HoodsKITALLFC: Charcoal filter, Hoods

